



→ Column lift for light-duty commercial vehicles



DH-VO.07.K1 • 500 - 750 kg



Light-duty column lift with manual closure

The DH-VO.07.K1 is a **light-duty column lift**, designed for commercial vehicles up to 7.5T GVW. This lift offers **maximum all-round efficiency**. In standard execution, it is equipped with a single-piece aluminium platform. Further, a wide range of options exists to adapt the lift to meet specific applications, such as:

- Roll-stops, hinged ramps and safety rails
- Dump-over and Dump-through lifts for **tipper vehicles**
- **Air-permeable mesh platforms and foldable platforms** for drop-side and flat-bed vehicles (less wind resistance, better fuel economy)
- K2 execution to **increase the lifting height** for any given column width [OVU015]. See also page 218
- K9 execution to **lift above the vehicle floor level** [OVU013]. See also page 219

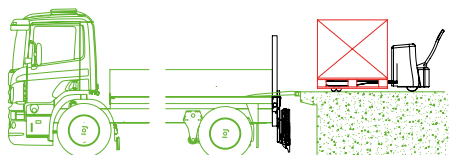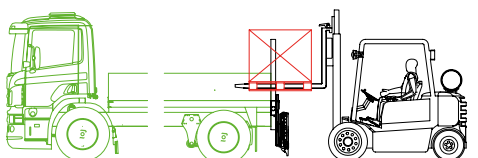

Lift capacity

DH-VO.07.K1

500 kg

750 kg

Technical specifications

Lift system	Lower beam: operated by a single lift cylinder mounted in an aluminium beam at the vehicle floor level and a set of chains & pulleys
Open / Close	Manual closure supported by torsion bars
Type of ride [see pg. 8-9]	Flat platform, level ride
Standard platform	<ul style="list-style-type: none"> • Flat platform with fixed leading edge • Roll-stops & hinged ramps available as an option
Platform material	<ul style="list-style-type: none"> • Light-weight aluminium platform; or • Air-permeable aluminium platform with steel mesh [OVP509.A] • Air-permeable aluminium platform with composite grids [OVP509.C]
Standard platform depths	<ul style="list-style-type: none"> • 900 - 1100 - 1300 mm • Other platform sizes on request
Std. control unit [see pg. 10]	OAE030.BT
Standard finish of the lift frame	Galvanised steel columns or aluminium columns [option OVF015]